




SL28A

Landing Gear

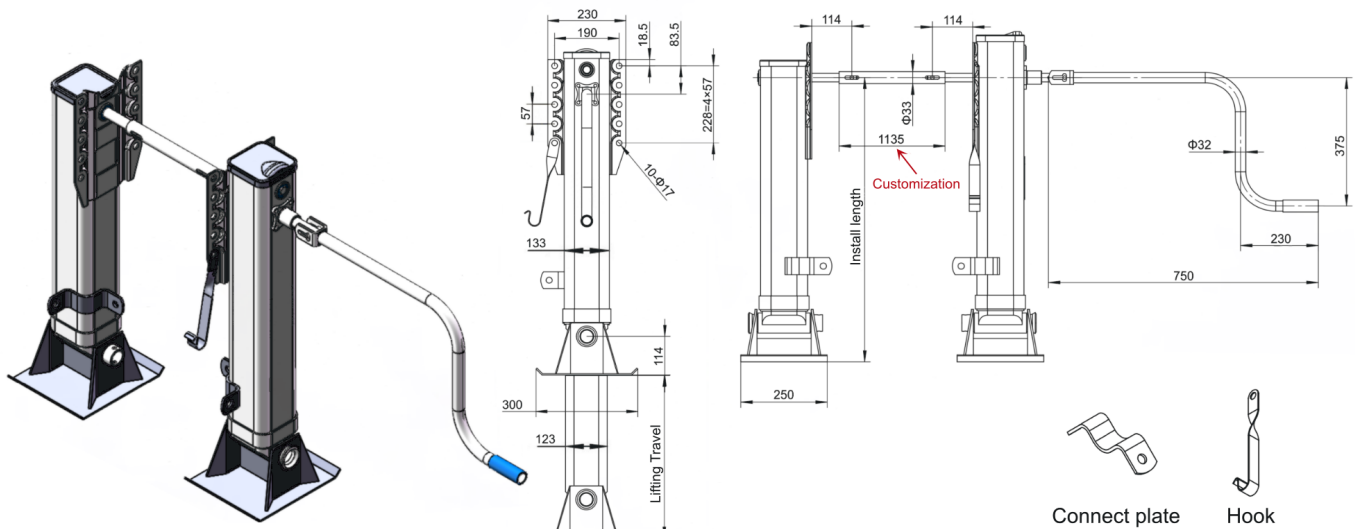

Lifting Form: L = Linkage

S = Single Action

Backplate: T = Top

D = Double

Shoe Type

S L 28 A T - 19 T

Product Model

Lifting (")

Model	High Gear	Low Gear	Lifting Capacity	Static Load	Backplate	Shoe	Install Length	Lifting Travel
SL28AT-17T	7.5 mm/r	0.83 mm/r	28 Ton	80 Ton	Top	T	795 mm	430 mm
SL28AT-19T							845 mm	480 mm
SL28AT-17S						S	800 mm	430 mm
SL28AT-19S							850 mm	480 mm
SL28AD-17T					Double	T	795 mm	430 mm
SL28AD-19T							845 mm	480 mm
SL28AD-17S						S	800 mm	430 mm
SL28AD-19S							850 mm	480 mm

1、双速设计，可在快速档和慢速档之间灵活切换，节省时间和人力。

Two-speed design, flexible switching between fast and slow gears, saving time and labor.

2、变速齿轮箱内装有高低温耐用的锂基润滑脂，可在-30℃至120℃的环境中使用。

The gearbox is equipped with high and low temperature resistant lithium grease, it can be used in the environment of -30℃ to 120℃.

3、产品表面采用精湛的喷塑工艺，具备防水、防锈和耐用特性。

The surface of the product with plastic spraying which is waterproof, rust-proof & durable.

4、高精度开孔翻边工艺。

High precision hole flanging process.

5、产品采用了行业内品质最优的核心组件，具备卓越的性能和稳定的质量。


It adopts the best quality core components with outstanding performance and stable quality.

PREMIUM HEAVY DUTY TRAILER PARTS MANUFACTURER



SL28C

Landing Gear

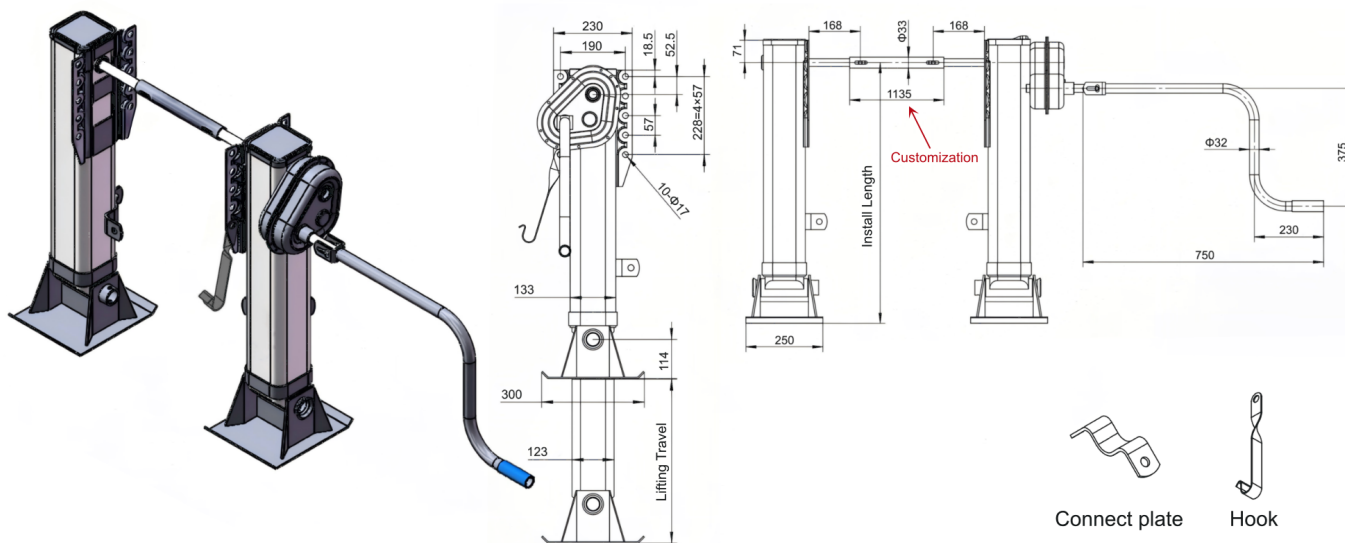

Lifting Form: L= Linkage

S= Single Action

Backplate: T = Top

D = Double

Shoe Type

S L 28 C T - 19 T

Product Model

Lifting (")

Model	High Gear	Low Gear	Lifting Capacity	Static Load	Backplate	Shoe	Install Length	Lifting Travel
SL28CT-17T	5.42 mm/r	0.72 mm/r	28 Ton	80 Ton	Top	T	795 mm	430 mm
SL28CT-19T							845 mm	480 mm
SL28CT-17S						S	800 mm	430 mm
SL28CT-19S							850 mm	480 mm
SL28CD-17T					Double	T	795 mm	430 mm
SL28CD-19T							845 mm	480 mm
SL28CD-17S						S	800 mm	430 mm
SL28CD-19S							850 mm	480 mm

1、双速设计，可在快速档和慢速档之间灵活切换，节省时间和人力。

Two-speed design, flexible switching between fast and slow gears, saving time and labor.

2、变速齿轮箱内装有高低温耐用的锂基润滑脂，可在-30℃至120℃的环境中使用的。

The gearbox is equipped with high and low temperature resistant lithium grease, it can be used in the environment of -30℃ to 120℃.

3、产品表面采用精湛的喷塑工艺，具备防水、防锈和耐用特性。

The surface of the product with plastic spraying which is waterproof, rust-proof & durable.

4、高精度度开孔翻边工艺。

High precision hole flanging process.

5、产品采用了行业内品质最优的核心组件，具备卓越的性能和稳定的质量。


It adopts the best quality core components with outstanding performance and stable quality.

PREMIUM HEAVY DUTY TRAILER PARTS MANUFACTURER



SL28N

Landing Gear

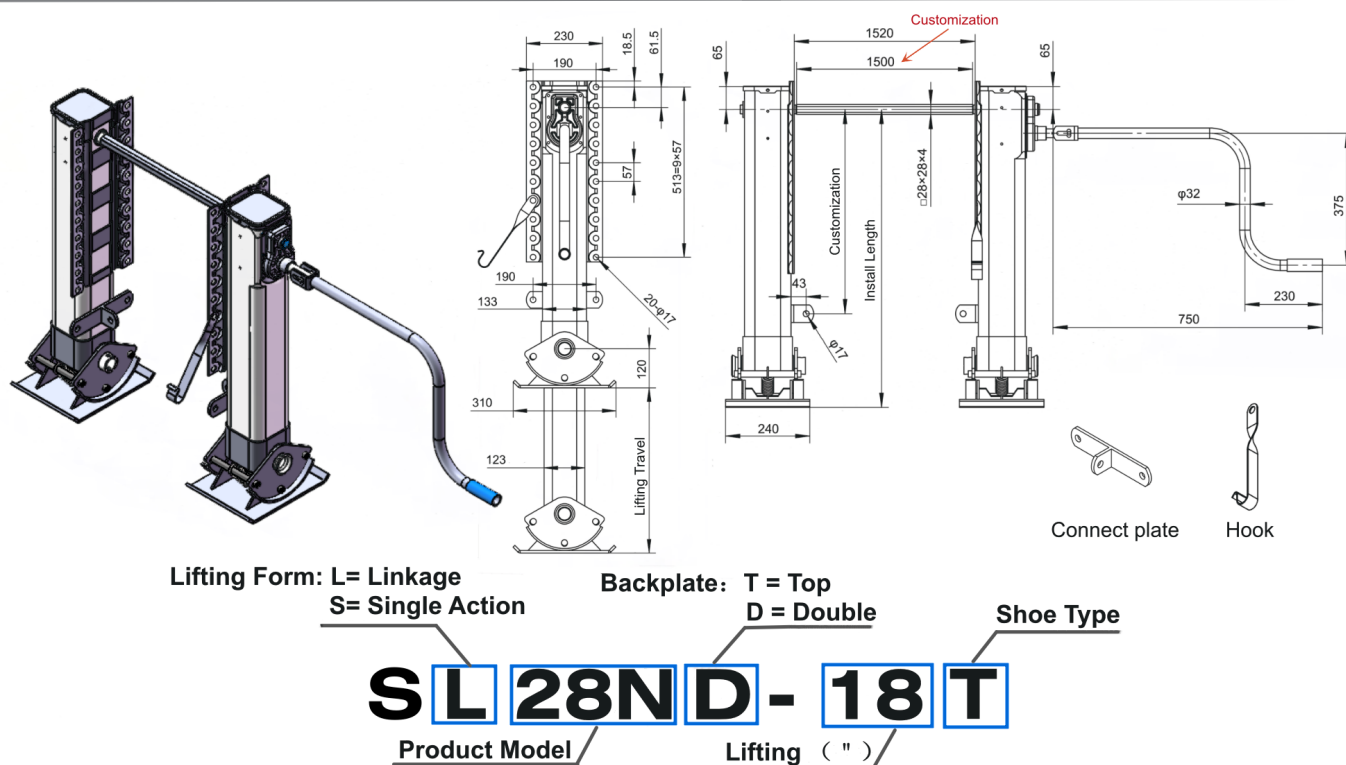


Model	High Gear	Low Gear	Lifting Capacity	Static Load	Backplate	Shoe	Install Length	Lifting Travel
SL28ND-18T	12 mm/r	1 mm/r	28 Ton	80 Ton	Double	T	795 mm	460 mm
SL28ND-20T							845 mm	510 mm
SL28ND-12S							650 mm	310 mm
SL28ND-14S						S	700 mm	360 mm
SL28ND-16S							750 mm	410 mm
SL28ND-18S							800 mm	460 mm
SL28ND-20S							850 mm	510 mm
SL28ND-22S							900 mm	560 mm

- 1、双速设计，可在快速档和慢速档之间灵活切换，节省时间和人力。
Two-speed design, flexible switching between fast and slow gears, saving time and labor.
- 2、变速齿轮箱内装有高低温耐用的锂基润滑脂，可在-30℃至120℃的环境中使用。
The gearbox is equipped with high and low temperature resistant lithium grease, it can be used in the environment of -30℃ to 120℃.
- 3、产品表面采用精湛的喷塑工艺，具备防水、防锈和耐用特性。
The surface of the product with plastic spraying which is waterproof, rust-proof & durable.
- 4、高精度开孔翻边工艺。
High precision hole flanging process.
- 5、产品采用了行业内品质最优的核心组件，具备卓越的性能和稳定的质量。
It adopts the best quality core components with outstanding performance and stable quality.

PREMIUM HEAVY DUTY TRAILER PARTS MANUFACTURER



Landing Gear



Backplate: T = Top
D = Double

Shoe Type

S L 28 E T - 19 T


Product Model

Lifting (")

Model	High Gear	Low Gear	Lifting Capacity	Static Load	Backplate	Shoe	Install Length	Lifting Travel
SL28ET-17T	5.42 mm/r	0.72 mm/r	28 Ton	80 Ton	Top	T	795 mm	430 mm
SL28ET-19T							845 mm	480 mm
SL28ET-17S						S	800 mm	430 mm
SL28ET-19S							850 mm	480 mm
SL28ED-17T					Double	T	795 mm	430 mm
SL28ED-19T							845 mm	480 mm
SL28ED-17S						S	800 mm	430 mm
SL28ED-19S							850 mm	480 mm

- 1、双速设计，可在快速档和慢速档之间灵活切换，节省时间和人力。
Two-speed design, flexible switching between fast and slow gears, saving time and labor.
- 2、变速齿轮箱内装有高低温耐用的锂基润滑脂，可在-30℃至120℃的环境中使用。
The gearbox is equipped with high and low temperature resistant lithium grease, it can be used in the environment of -30℃ to 120℃.
- 3、产品表面采用精湛的喷塑工艺，具备防水、防锈和耐用特性。
The surface of the product with plastic spraying which is waterproof, rust-proof & durable.
- 4、高精度开孔翻边工艺。
High precision hole flanging process.
- 5、产品采用了行业内品质最优的核心组件，具备卓越的性能和稳定的质量。
It adopts the best quality core components with outstanding performance and stable quality.

PREMIUM HEAVY DUTY TRAILER PARTS MANUFACTURER

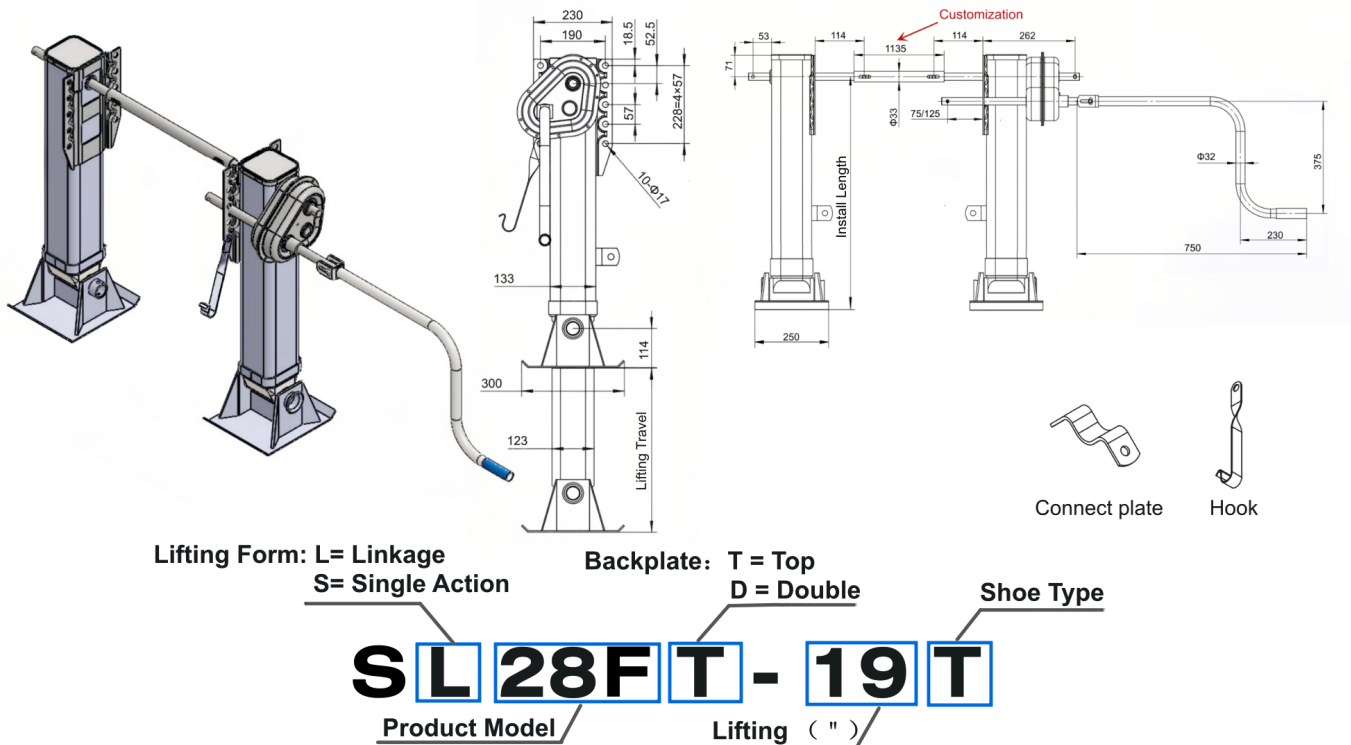

Model	High Gear	Low Gear	Lifting Capacity	Static Load	Backplate	Shoe	Install Length	Lifting Travel
SL28FT-17T	5.42 mm/r	0.72 mm/r	28 Ton	80 Ton	Top	T	795 mm	430 mm
SL28FT-19T							845 mm	480 mm
SL28FT-17S						S	800 mm	430 mm
SL28FT-19S							850 mm	480 mm
SL28FD-17T					Double	T	795 mm	430 mm
SL28FD-19T							845 mm	480 mm
SL28FD-17S						S	800 mm	430 mm
SL28FD-19S							850 mm	480 mm

- 1、双速设计，可在快速档和慢速档之间灵活切换，节省时间和人力。
Two-speed design, flexible switching between fast and slow gears, saving time and labor.
- 2、变速齿轮箱内装有高低温耐用的锂基润滑脂，可在-30℃至120℃的环境中使用的。
The gearbox is equipped with high and low temperature resistant lithium grease, it can be used in the environment of -30℃ to 120℃.
- 3、产品表面采用精湛的喷塑工艺，具备防水、防锈和耐用特性。
The surface of the product with plastic spraying which is waterproof, rust-proof & durable.
- 4、高精度开孔翻边工艺。
High precision hole flanging process.
- 5、产品采用了行业内品质最优的核心组件，具备卓越的性能和稳定的质量。
It adopts the best quality core components with outstanding performance and stable quality.

PREMIUM HEAVY DUTY TRAILER PARTS MANUFACTURER