



Powering Wheel End Excellence


Hubodometers

Catalog and Installation




- **Mechanical transmission**
- **Stainless steel parts**
- **Dual sealing**
- **UV resistant window**
- **Slim design**
- **Easy installation**
- **Records both directions**
- **Support customization**

Easy Installation

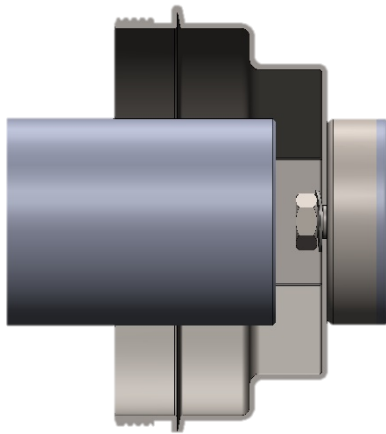

Installed on hubcaps

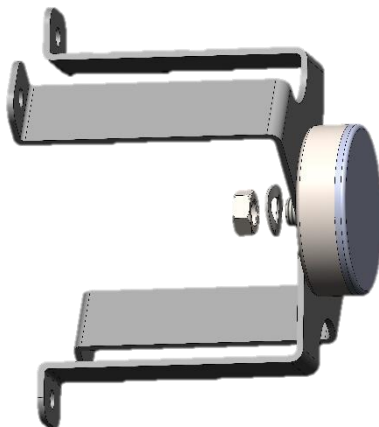

Installed on brackets

Selection Guide

Popular tyres vs Hubodometer models

TYRE SIZE	REV/KM	Hubodometer Part Number	TYRE SIZE	REV/KM	Hubodometer Part Number
7.00-15	436	601-431	10.00-20	310	601-310
7.00R15	436	601-431	10.00-22	300	601-300
7.50-15	410	601-410	10.00R15	357	601-357
7.50-16	400	601-400	10.00R20	315	601-315
7.50R15	432	601-431	10.00R22	310	601-310
7.50R16	412	601-410	10.00R24	300	601-300
7.5-20	346	601-347	10R17.5	396	601-396
8.00R16.5	460	601-462	10R22.5	324	601-324
8.25-20	396	601-396	11.00-20	300	601-300
8.25R15	336	601-336	11.00-22	290	601-290
8.5R17.5	396	601-396	10.00R20	300	601-300
8.25-15	380	601-380	11.00R22	290	601-290
8.25R16	342	601-342	11.00R24	280	601-280
8.25R20	412	601-410	11.50-20	304	601-305
8.75-16	450	601-451	11/70R22.5	346	601-347
8.75R16	450	601-451	11-22.5	311	601-310
8.75R16.5	436	601-431	11-24.5	300	601-300
8-14.5	460	601-462	11R17.5	357	601-357
8-19.5	380	601-380	11R22.5	311	601-310
8-22.5	346	601-347	11R24.5	300	601-300
8R17.5	420	601-420	12.00-20	290	601-290
8R19.5	396	601-396	12.00-24	270	601-270
9.00-15	378	601-378	12.00R20	290	601-290
9.00-20	311	601-310	12.00R24	270	601-270
9.00R15	378	601-378	12.5-22.5	304	601-305
9.00R20	324	601-324	12.5R20	320	601-320
9.50-16.5	432	601-431	12.5R22.5	300	601-300
9.50R16.5	432	601-431	12.75R22.5	304	601-305
9.5-17.5	396	601-396	12-16.5	400	601-400
9-14.5	460	601-462	12-22.5	300	601-300
9-22.5	336	601-336	12-24.5	290	601-290
9R16.5	432	601-431	12R22.5	304	601-305
9R17.5	396	601-396	12R24.5	290	601-290
9R22.5	342	601-342	13.00R20	280	601-280
10	324	601-324	13/80R20	315	601-315
10.00-15	357	601-357	13-22.5	290	601-290

Popular tyres vs Hubodometer models

TYRE SIZE	REV/KM	Hubodometer Part Number	TYRE SIZE	REV/KM	Hubodometer Part Number
13R22.5	294	601-294	245/70R19.5	396	601-396
48x34x20	270	601-270	245/75R16	432	601-431
14.00-24	249	601-250	245/75R22.5	346	601-347
14.00R20	260	601-260	255/70R22.5	357	601-357
14.5R20	412	601-410	255/80R22.5	342	601-342
14/80R20	304	601-305	265/70R19.5	380	601-380
14-17.5	357	601-357	265/75R16	412	601-410
15-19.5	336	601-336	265/75R22.5	336	601-336
15-22.5	311	601-310	275/70R22.5	342	601-342
15R22.5	311	601-310	275/80R22.5	320	601-320
16.00R20	249	601-250	275/80R24.5	315	601-315
16.5-22.5	294	601-294	285/70R19.5	373	601-360
16.5R22.5	294	601-294	285/75R24.5	315	601-315
18-19.5	311	601-310	295/75R22.5	330	601-330
18-22.5	290	601-290	295/80R22.5	315	601-315
18R19.5	306	601-305	295/85R22.5	311	601-310
18R22.5	283	601-284	305/70R22.5	330	601-330
195/75R14	413	601-410	305/75R24.5	306	601-305
205/75R17.5	436	601-431	315/70R22.5	324	601-324
205/85R16	435	601-431	315/75R22.5	315	601-315
215/70R17.5	436	601-431	315/80R22.5	306	601-305
215/75R17.5	432	601-431	365/70R22.5	300	601-300
215/85R16	432	601-431	365/80R20	304	601-305
225/70R15	465	601-462	37x12.5R16.5	357	601-357
225/70R19.5	400	601-400	385/55R22.5	332	601-330
225/70R22.5	357	601-357	385/65R19.5	330	601-330
225/75R15	450	601-451	385/65R22.5	311	601-310
225/75R16	450	601-451	385/75R22.5	311	601-310
225/75R17.5	420	601-420	395/85R20	280	601-280
225/90R17.5	380	601-380	425/65R22.5	294	601-294
235/75R15	450	601-451	445/45R19.5	366	601-360
235/75R17.5	412	601-410	445/50R22.5	324	601-324
235/80R22.5	346	601-347	445/65R19.5	306	601-305
235/85R16	412	601-410	445/65R22.5	283	601-284
245/70R15	460	601-462	445/95R25	224	601-225
245/70R17.5	418	601-420			

Selection Guide for BPW axles

BPW 6.5~9 ton axles

Axle Series	Axle Type	Hubcap Thread	Tyre Size	Rolling circumference	Hubcap w/ hubodometer BPW part number	SFD PN Kilometers
H.. / R..	H.. / R..	M 115 x 2	365 / 80 R 20	3280 - 3310	05.212.23.27.0	601-300
			385 / 65 R 22.5	3240 - 3260	05.212.23.35.0	601-310
			10.00 R 20	3175 - 3220	05.212.23.34.0	601-315
			11.00 R 22.5	3175 - 3220	05.212.23.34.0	601-315
	H.. ECO / ECO-MAXX	M 125 x 2	365 / 80 R 20	3280 - 3310	05.212.24.56.0	601-300
			385 / 65 R 22.5	3240 - 3260	05.212.24.29.0	601-310
			425 / 65 R 22.5	3410 - 3470	05.212.24.54.0	601-290
			10.00 R 20	3175 - 3220	05.212.24.49.0	601-315
			11.00 R 22.5	3175 - 3220	05.212.24.49.0	601-315
			315 / 70 R 22.5	3015 - 3134	05.212.24.33.0	601-324
			275 / 70 R 22.5	2915	05.212.24.52.0	601-342
			255 / 70 R 22.5	2830 - 2860	05.212.24.53.0	601-357
	H.. ECOPlus	M 136 x 2.5	255 / 70 R 22.5	2830 - 2860	05.212.25.41.0	601-357
			275 / 70 R 22.5	2915	05.212.25.42.0	601-342
			385 / 55 R 22.5	3015 - 3134	05.212.25.44.0	601-324
			315 / 70 R 22.5	3015 - 3134	05.212.25.44.0	601-324
			10.00 R 20	3175 - 3220	05.212.25.45.0	601-315
			11.00 R 22.5	3175 - 3220	05.212.25.45.0	601-315
			385 / 65 R 22.5	3240 - 3260	05.212.25.46.0	601-310
			12.00 R 22.5	3280 - 3310	05.212.25.47.0	601-300
			425 / 65 R 22.5	3410 - 3470	05.212.25.48.0	601-290
			13.00 R 22.5	3505	05.212.25.49.0	601-284
			445 / 65 R 22.5	3505	05.212.25.49.0	601-284
	H.. ECO Plus 2	Bayonet lock	385 / 55 R 22.5	3015 - 3134	05.212.25.73.0	601-324
			315 / 70 R 22.5	3015 - 3134	05.212.25.73.0	601-324
			11.00 R 22.5	3175 - 3220	05.212.25.74.0	601-315
			385 / 65 R 22.5	3240 - 3260	05.212.25.75.0	601-310
KH.. / KR..	KH.. / KR..	M 115 x 2	265 / 70 R 19.5	2620 - 2650	05.212.23.29.0	601-380
	KH.. ECO / ECO-MAXX	M 125 x 2	385 / 65 R 19.5	3015 - 3134	05.212.24.33.0	601-324
			425 / 55 R 19.5	2960	05.212.24.46.0	601-336
			445 / 45 R 19.5	2730 - 2790	05.212.24.50.0	601-368
			265 / 70 R 19.5	2620 - 2650	05.212.24.34.0	601-380
			245 / 70 R 19.5	2560	05.212.24.44.0	601-380
	KH.. ECOPlus	M 136 x 2.5	265 / 70 R 19.5	2620 - 2650	05.212.25.38.0	601-380
			285 / 70 R 19.5	2712 - 2750	05.212.25.39.0	601-378
			445 / 45 R 19.5	2730 - 2790	05.212.25.40.0	601-368
			425 / 55 R 19.5	2960	05.212.25.43.0	601-336
	KH.. ECO Plus 2	Bayonet lock	445 / 45 R 19.5	2790	05.212.25.72.0	601-368

Axle Series	Axle Type	Hubcap Thread	Tyre Size	Rolling circumference	Hubcap w/ hubodometer BPW part number	SFD PN Kilometers
NH.. / NR..	NH.. / NR..	M 115 x 2	215 / 75 R 17.5	2350	05.212.23.30.0	601-431
			235 / 75 R 17.5	2425	05.212.23.31.0	601-420
			245 / 70 R 17.5	2464 - 2520	05.212.23.36.0	601-410
	NH.. ECO / ECO-MAXX	M 125 x 2	215 / 75 R 17.5	2350	05.212.24.35.0	601-431
			235 / 75 R 17.5	2464 - 2520	05.212.24.58.0	601-410
			245 / 70 R 17.5	2425	05.212.24.36.0	601-420
			205 / 65 R 17.5	2170	05.212.24.48.0	601-462

BPW 10~12 ton axles

Axle Series	Axle Type	Hubcap Thread	Tyre Size	Rolling circumference	Hubcap w/ hubodometer BPW part number	SFD PN Kilometers
H.. / R..	H.. / R..	M 125 x 2	425 / 65 R 22.5	3410 - 3470	05.212.24.32.0	601-290
			445 / 65 R 22.5	3505	05.212.24.37.0	601-284
			385 / 65 R 22.5	3240 - 3260	05.212.24.43.0	601-310
			275 / 70 R 22.5	2915	05.212.24.38.0	601-342
			10.00 R 20	3175 - 3220	05.212.24.31.0	601-315
			11.00 R 22.5	3175 - 3220	05.212.24.31.0	601-315
			12.00 R 22.5	3280 - 3310	05.212.24.39.0	601-300
			13.00 R 22.5	3410 - 3470	05.212.24.32.0	601-290
	H.. ECO / ECO-MAXX	M 135 x 2	425 / 65 R 22.5	3410 - 3470	05.212.25.11.0	601-290
			445 / 65 R 22.5	3505	05.212.25.12.0	601-284
			385 / 65 R 22.5	3240 - 3260	05.212.25.19.0	601-310
			275 / 70 R 22.5	2915	05.212.25.13.0	601-342
			10.00 R 20	3175 - 3220	05.212.25.10.0	601-315
			11.00 R 22.5	-	05.212.25.10.5	601-320
			12.00 R 22.5	3280 - 3310	05.212.25.14.0	601-300
			13.00 R 22.5	3410 - 3470	05.212.25.11.0	601-290
			255 / 70 R 22.5	2830 - 2860	05.212.25.24.0	601-357
			315 / 70 R 22.5	3015 - 3134	05.212.25.25.0	601-324
	H.. ECO / ECO-MAXX / ECOPlus	M 136 x 2.5	255 / 70 R 22.5	2830 - 2860	05.212.25.41.0	601-357
			275 / 70 R 22.5	2915	05.212.25.42.0	601-342
			315 / 70 R 22.5	3015 - 3134	05.212.25.44.0	601-324
			10.00 R 20	3175 - 3220	05.212.25.45.0	601-315
			11.00 R 22.5	3175 - 3220	05.212.25.45.0	601-315
			385 / 65 R 22.5	3240 - 3260	05.212.25.46.0	601-310
			12.00 R 22.5	3280 - 3310	05.212.25.47.0	601-300
			425 / 65 R 22.5	3410 - 3470	05.212.25.48.0	601-290
			13.00 R 22.5	3505	05.212.25.49.0	601-284
			445 / 65 R 22.5	3505	05.212.25.49.0	601-284

Axle Series	Axle Type	Hubcap Thread	Tyre Size	Rolling circumference	Hubcap w/ hubodometer BPW part number	SFD PN Kilometers
KH.. / KR..	KH.. / KR..	M 125 x 2	285 / 70 R 19.5	2712 - 2750	05.212.24.40.0	601-378
	KH.. ECO / ECO-MAXX	M 135 x 2	285 / 70 R 19.5	2712 - 2750	05.212.25.16.0	601-378
			265 / 70 R 19.5	2620 - 2650	05.212.25.20.0	601-380
			245 / 70 R 19.5	2560	05.212.25.28.0	601-396
	KH.. ECO / ECO-MAXX / ECOPlus	M 136 x 2.5	265 / 70 R 19.5	2620 - 2650	05.212.25.38.0	601-380
			285 / 70 R 19.5	2712 - 2750	05.212.25.39.0	601-378
			445 / 45 R 19.5	2790	05.212.25.40.0	601-368
			425 / 55 R 19.5	2960	05.212.25.43.0	601-336
NH.. / NR..	NH.. / NR..	M 125 x 2	235 / 75 R 17.5	2425	05.212.24.41.0	601-420
			245 / 70 R 17.5	2464 - 2520	05.212.24.57.0	601-410
			9.50 R 17.5	2560	05.212.24.42.0	601-396
			8.25 R 15	-	05.212.24.42.0	601-396
	NH.. ECO / ECO-MAXX	M 135 x 2*	245 / 75 R 17.5	2425	05.212.25.17.0*	601-420
			235 / 70 R 17.5	2464 - 2520	05.212.25.51.0*	601-410
			9.50 R 17.5	2560	05.212.25.28.0*	601-396
			8.25 R 15	-	05.212.25.28.0*	601-396
		M 136 x 2.5*	205 / 65 R 17.5	2170	05.212.25.34.0*	601-462
			215 / 75 R 17.5	2350	05.212.25.35.0*	601-431
			245 / 70 R 17.5	2425	05.212.25.36.0*	601-420
			235 / 75 R 17.5	-	05.212.25.36.0*	601-420
			9.50 R 17.5	2560	05.212.25.37.0*	601-396
			8.25 R 17.5	-	05.212.25.37.0*	601-396

Contact us if your tyre is not listed above.

Tyre brands, tyre series, and model numbers are needed.

Example: Bridgestone, M720, 285/75R24.5



Visit <https://saifudetech.com> Contact: info@saifudetech.com